



Front View



Features

- Flexible front I/O and rear I/O application options
- 4 x easy swap fans for superior cooling
- Supports GPU card with 2U riser card
- Supports up to 4 x 2.5" external hot swap drive bays
- Includes a redundant PSU 80+ Platinum
- Two front access USB 3.0 ports
- Short-depth design for space critical applications
- Supports 2 post or 4 post rack deployment

Rear View



Specifications


Dimensions (W x D x H)	mm : 438 x 450 x 88	
	inches : 17.2 x 17.7 x 3.5	
Industry Standard	EIA-RS310D	
Material	Heavy-duty preplated SGCC cold-rolled steel	
Color	Black	
Cooling	Standard	4 x 60x38mm easy swap fans
Power Supply	Standard	800W 1+1 redundant PSU 80+ Platinum
Expansion Slot	Standard	1 x PCIe x16 Gen3 single slot + 1 x PCIe x8 Gen4 single slot
	Option	1 x PCIe x16 Gen4 dual slot + 1 x PCIe x8 Gen4 single slot or 7 x low profile slots
Front Panel	System power on/off, System reset and 2 x USB ports	
LED Indicators	Power status, LAN activity and Drive activity	
System Board	Up to 12"(W) x 13"(D) EATX compliant MB	

Drive Bays	External	2.5" hot swap	4
Backplanes	2pcs dual ports SATA BP to support 4 x SATA		
Storage Temperature	0°C(32°F) ~ 50°C(122°F)		
Humidity	5%~95% non-condensing		
Gross Weight	(w/ PSU; w/o Rail)	kgs : 13	
		lbs : 28.5	
Packaging Dimensions	(W x D x H)	mm : 655 x 580 x 244	
		inches : 25.8 x 22.8 x 9.6	
Cubic Feet	3.2		
Container Load Quantity	20'	295	
	40'	625	
	40' H	720	
Mounting	Optional	20" slide rail	

Top View



(Power supply is optional. Motherboard is not included.)

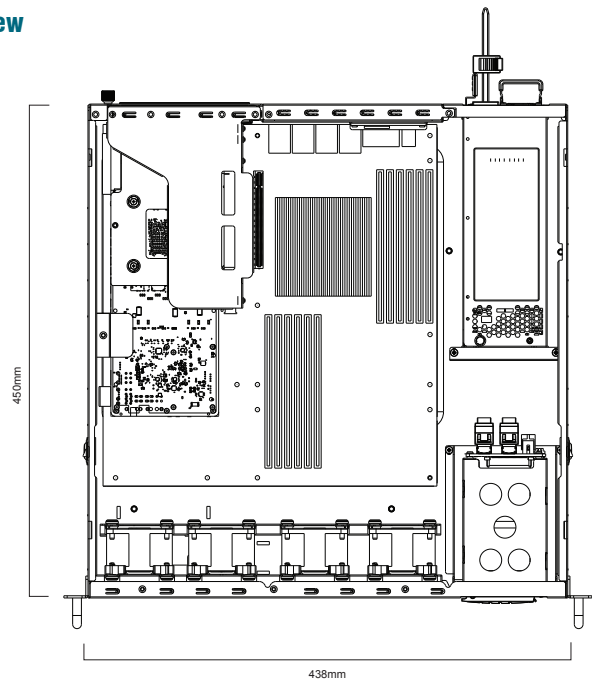

Ordering Information

SKU Number	Description
XE1-2E000-01	2U external 4x 2.5" SATA hot-swap (w/o SATA cable), 4x 6038 fan, 800W 1+1 Platinum redundant power supply, 2x full-height slots, 1x low profile slot rear window, with 1x PCIe Gen3 x16 slot riser card (RC-PE2U23-TY), 1x PCIe Gen4 x8 slot riser card (RC-PE1U34-TY), w/o rail
XE1-2E000-02	2U external 4x 2.5" SATA hot-swap (w/o SATA cable), 4x 6038 fan, 800W 1+1 Platinum redundant power supply, 2x full-height slots, 1x low profile slot rear window, with 1x PCIe Gen4 x16 slot + 1x PCIe Gen4 x8 slot riser card (shared/RC-PE2U22-TY), 1x PCIe Gen4 x8 slot riser card (RC-PE1U34-TY), w/o rail
XE1-2E000-03	2U external 4x 2.5" SATA hot-swap (w/o SATA cable), 4x 6038 fan, 800W 1+1 Platinum redundant power supply, 7 low profile slots rear window, w/o rail
XE1-2E000-04	2U external 4x 2.5" NVMe hot-swap (w/o slimline cable), 4x 6038 fan, 800W 1+1 Platinum redundant power supply, 7 low profile slots rear window, w/o rail
XE1-2E000-05	2U external 4x 2.5" SATA hot-swap (w/o SATA cable), 4x 6038 fan, 800W 1+1 Titanium redundant power supply, 7 low profile slots rear window, w/o rail
XE1-2E000-06	2U external 4x 2.5" NVMe hot-swap (w/o slimline cable), 4x 6038 fan, 800W 1+1 Titanium redundant power supply, 7 low profile slots rear window, w/o rail
XE1-2E000-07	2U external 4x 2.5" SATA hot-swap (w/o SATA cable), 4x 6038 fan, 800W 1+1 Titanium redundant power supply, 2x full-height slots, 1x low profile slot rear window, with 1x PCIe Gen3 x16 slot riser card (RC-PE2U23-TY), 1x PCIe Gen4 x8 slot riser card (RC-PE1U34-TY), w/o rail
XE1-2E000-08	2U external 4x 2.5" SATA hot-swap (w/o SATA cable), 4x 6038 fan, 800W 1+1 Titanium redundant power supply, 2x full-height slots, 1x low profile slot rear window, with 1x PCIe Gen4 x16 slot + 1x PCIe Gen4 x8 slot riser card (shared/RC-PE2U22-TY), 1x PCIe Gen4 x8 slot riser card (RC-PE1U34-TY), w/o rail
XE1-2E000-09	2U external 4x 2.5" NVMe hot-swap (w/o slimline cable), 4x 6038 fan, 800W 1+1 Platinum redundant power supply, 2x full-height slots, 1x low profile slot rear window, with 1x PCIe Gen3 x16 slot riser card (RC-PE2U23-TY), 1x PCIe Gen4 x8 slot riser card (RC-PE1U34-TY), w/o rail