



Front View

12 x 3.5" hot swap drive bays



Specifications

Dimensions (W x D x H)	mm : 430 x 680 x 88		
	inches : 17 x 26.8 x 3.5		
Industry Standard	EIA-RS310D		
Material	Heavy-duty preplated SGCC cold-rolled steel		
Color	Front Panel : Black		
Cooling	3 x 80x38mm hot swap fans		
Power Supply	1200W 1+1 redundant PSU PMBus 1.2 80+ Platinum		
Expansion Slots	7 low profile		
Front Panel	System power on/off, System ID, System reset and 2 x USB 3.0 ports		
LED Indicators	Power, LAN, Drive and Alert		
System Board	12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant MB		
Drive Bays	External	3.5" hot swap	12 x SATA/SAS3/SAS4/NVMe
		2.5" hot swap	2 (15mm)

Features

- Tool-less design supports quick installation and easy maintenance:
 - Tool-less 3.5" & 2.5" drive trays
 - Tool-less top covers
 - Tool-less slide rails
- Flexible backplane support
- 12Gb/s SAS3 / 24Gb/s SAS4 expander chip / NVMe Tri-mode on backplane
- Specially designed hot swap and low power consumption fans minimize rotational vibration and provide superior cooling
- 3.5" drive tray comes with 4 screw holes to adapt to 2.5" drive
- 80+ Platinum redundant power supply
- Two front access USB 3.0 ports


Rear View




Backplane	• SKU1: 1 x 12-port SAS3 expander backplane	
	• SKU2: 1 x 4-port 12G SAS / PCIe Gen4 NVMe Tri-mode backplane + 2 x 4-port 12G SAS backplane	
	• SKU3: 2 x 4-port 12G SAS / PCIe Gen4 NVMe Tri-mode backplane + 1 x 4-port 12G SAS backplane	
	• SKU4: 3 x 4-port 12G SAS / PCIe Gen4 NVMe Tri-mode backplane	
	• SKU5: 1 x 12-port SAS4 expander backplane	
Storage Temperature	0°C(32°F) ~ 50°C(122°F)	
Humidity	5%~95% non-condensing	
Gross Weight	(w/ PSU & Rail)	kgs : 23.5
		lbs : 51.8
Packaging Dimensions	(W x D x H)	mm : 645 x 835 x 230
		inches : 25.4 x 32.9 x 9.06
Cubic Feet	4.37	
Container Load Quantity	20'	200
	40'	420
	40' H	450
Mounting	Standard	28" tool-less slide rail



Top View

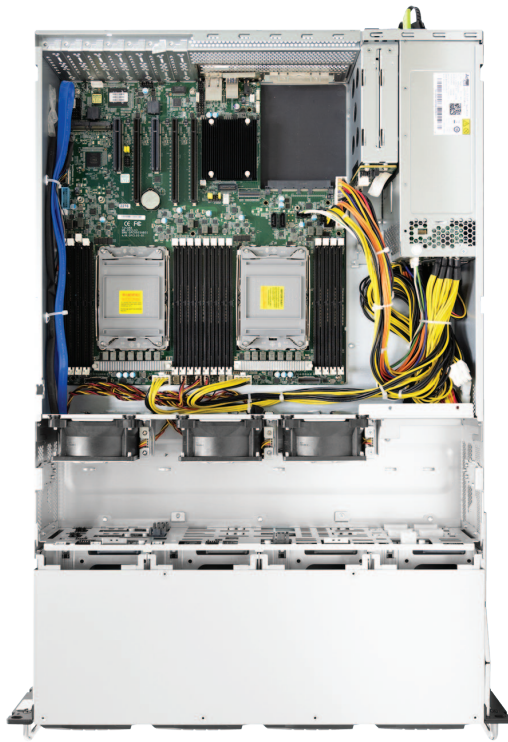

(Motherboard is not included.)

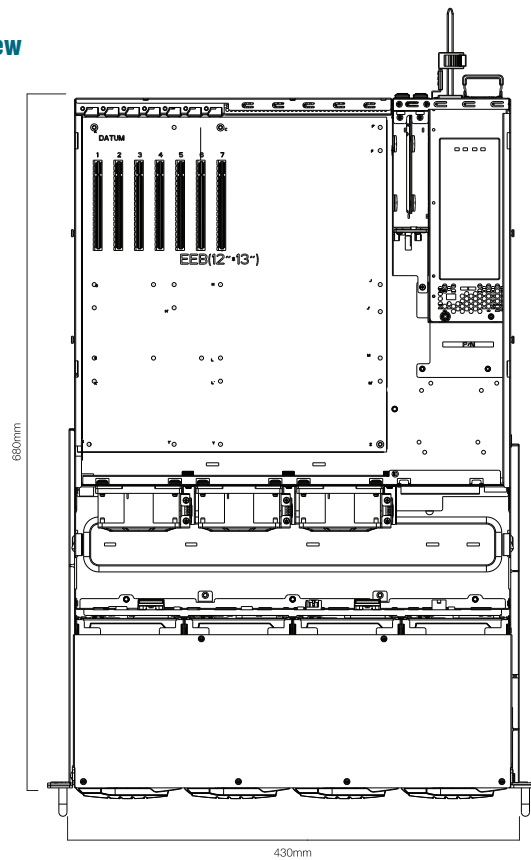

Ordering Information

SKU Number	Description
XE1-2ET01-06	2U 4x 3.5"/2.5" SAS/SATA/NVMe + 8x 3.5"/2.5" SAS/SATA hot-swap (Passive BP) chassis, 2x 2.5" 15mm SATA hot-swap, 3x 8038 fan, Acbel 1200W redundant power supply Platinum, low profile rear panel, 28" slide rail, w/o bezel
XE1-2ET01-07	2U 8x 3.5"/2.5" SAS/SATA/NVMe + 4x 3.5"/2.5" SAS/SATA hot-swap (Passive BP) chassis, 2x 2.5" 15mm SATA hot-swap, 3x 8038 fan, Acbel 1200W redundant power supply Platinum, low profile rear panel, 28" slide rail, w/o bezel
XE1-2ET01-08	2U 12x 3.5"/2.5" SAS/SATA/NVMe hot-swap (Passive BP) chassis, 2x 2.5" 15mm SATA hot-swap, 3x 8038 fan, Acbel 1200W redundant power supply Platinum, low profile rear panel, 28" slide rail, w/o bezel
XE1-2ET01-09	2U 12x 3.5"/2.5" SAS/SATA hot-swap (EOB BP) chassis, 2x 2.5" 7mm SATA hot-swap, 3x 8038 fan, Acbel 1200W redundant power supply Platinum, low profile rear panel, 28" slide rail, w/o bezel
XE1-2ET01-10	2U 8x 3.5"/2.5" SAS/SATA/NVMe + 4x 3.5"/2.5" SAS/SATA hot-swap (Passive BP) chassis, 2x 2.5" 7mm SATA hot-swap, 3x 8038 fan, Acbel 1300W redundant power supply Titanium, low profile rear panel, 28" slide rail, w/o bezel
XE1-2ET01-11	2U 4x 3.5"/2.5" SAS/SATA/NVMe + 8x 3.5"/2.5" SAS/SATA hot-swap (Passive BP) chassis, 2x 2.5" 7mm SATA hot-swap, 3x 8038 fan, Acbel 1300W redundant power supply Titanium, low profile rear panel, 28" slide rail, w/o bezel
XE1-2ET01-12	2U 12x 3.5"/2.5" SAS/SATA hot-swap (EOB BP) chassis, 2x 2.5" 15mm PCIe Gen4 NVMe hot-swap, 3x 8038 fan (14800 RPM), Acbel 1300W redundant power supply Titanium, low profile rear panel, 28" slide rail, w/o bezel