



Front View



8 x 3.5" hot swap drive bays

Specifications

Dimensions (W x D x H)	mm : 430 x 680 x 88
	inches : 17 x 26.8 x 3.5
Industry Standard	EIA-RS310D
Material	Heavy-duty preplated SGCC cold-rolled steel
Color	Front Panel : Black
Cooling	• 3 x 80x25mm easy swap fans • 3 x 80x38mm easy swap fans (option)
Power Supply	550W/800W 1+1 redundant PSU PMBus 1.2 80+ Platinum
Expansion Slots	7 low profile
Front Panel	System power on/off, System reset and 1 x USB 3.0 port
LED Indicators	Power, LAN, Drive and Alert
System Board	12"(W) x 13"(D) E-ATX MB

Features


- Tool-less design supports quick installation and easy maintenance:
 - Tool-less 3.5" & 2.5" drive trays
 - Tool-less top covers
 - Tool-less slide rails
- Flexible backplane support
- Specially designed hot swap and low power consumption fans minimize rotational vibration and provide superior cooling
- 3.5" drive tray comes with 4 screw holes to adapt to 2.5" drive
- Comes with a redundant PSU 80+ Platinum
- One front access USB 3.0 port

Rear View




Drive Bays	External	3.5" hot swap	8
		2.5" hot swap	2 (15mm)
	Internal	2.5"	2 or 4 (optional)
Backplane	• 4-port SAS3/SATA backplane • 4-port SAS3/SATA/PCIe Gen4 NVMe Tri-mode backplane		
Storage Temperature	0°C(32°F) ~ 50°C(122°F)		
Humidity	5%~95% non-condensing		
Gross Weight	(w/ PSU & Rail)	kgs : 20.5	
		lbs : 45	
Packaging Dimensions	(W x D x H)	mm : 645 x 835 x 234	
		inches : 25.4 x 32.9 x 9.2	
Mounting	Standard	28" tool-less slide rail	

Top View

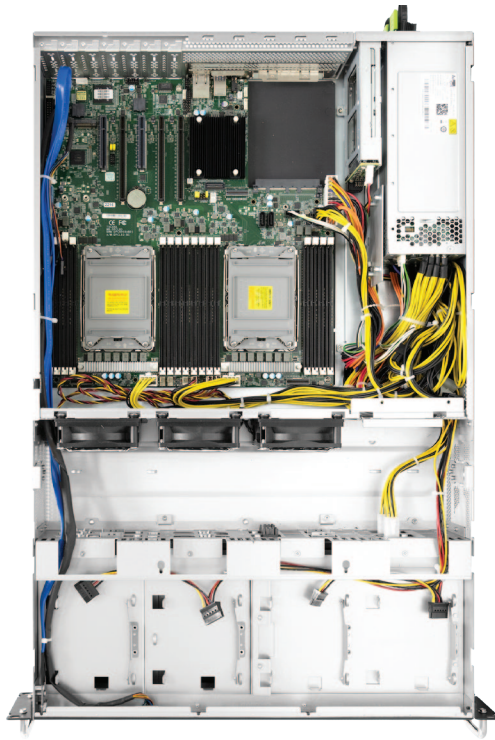

(Motherboard is not included.)

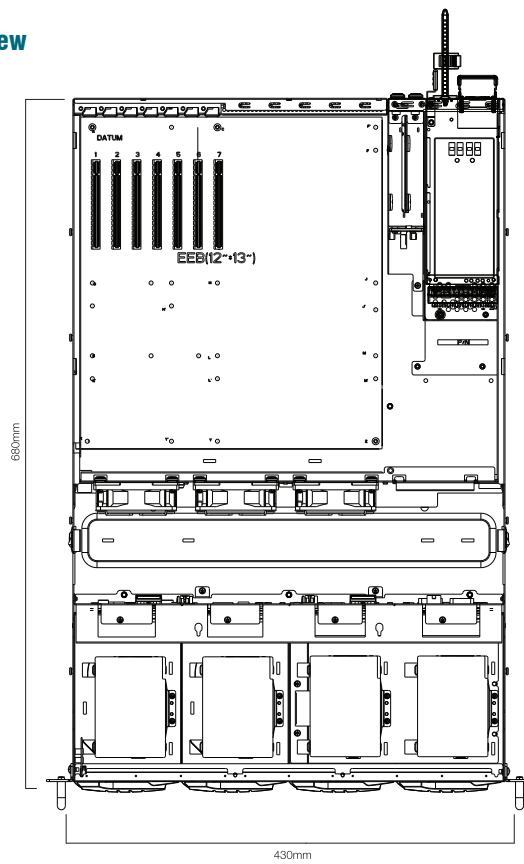

Ordering Information

SKU Number	Description
XE1-2KT01-01	2U 8x 3.5"/2.5" SAS/SATA hot-swap chassis, top plate 4x 2.5" 15mm internal, 3x 8025 fans, 550W redundant power supply Platinum, low profile rear panel, 28" slide rail, without bezel
XE1-2KT01-02	2U 8x 3.5"/2.5" SAS/SATA hot-swap chassis, top plate 4x 2.5" 15mm internal, 2x 2.5" 15mm SATA hot-swap, 3x 8025 fans, 800W redundant power supply Platinum, low profile rear panel, 28" slide rail, without bezel
XE1-2KT01-03	2U 4x 3.5"/2.5" SAS/SATA/NVMe + 4x 3.5"/2.5" SAS/SATA hot-swap (Passive BP) chassis, top plate 4x2.5" 15mm internal, 2x 2.5" 15mm SATA hot-swap, 3x 8025 fans, 800W redundant power supply Platinum, low profile rear panel, 28" slide rail, without bezel
XE1-2KT01-04	2U 8x 3.5"/2.5" SAS/SATA/NVMe hot-swap (Passive BP) chassis, top plate 4x 2.5" 15mm internal, 2x 2.5" 15mm SATA hot-swap, 3x 8038 fans, 800W redundant power supply Platinum, low profile rear panel, 28" slide rail, without bezel
XE1-2KT01-05	2U 4x 3.5"/2.5" SAS/SATA/NVMe + 4x 3.5"/2.5" SAS/SATA hot-swap (Passive BP) chassis, top plate 4x2.5" 15mm internal, 2x 2.5" 15mm SATA hot-swap, 3x 8025 fans, Acbel 800W redundant power supply Titanium, low profile rear panel, 28" slide rail, without bezel
XE1-2KT01-06	2U 8x 3.5"/2.5" SAS/SATA/NVMe hot-swap (Passive BP) chassis, top plate 4x 2.5" 15mm internal, 2x 2.5" 15mm SATA hot-swap, 3x 8038 fans, Acbel 800W redundant power supply Titanium, low profile rear panel, 28" slide rail, without bezel
XE1-2KT01-09	2U 4x 3.5"/2.5" SAS/SATA/NVMe + 4x 3.5"/2.5" SAS/SATA hot-swap (Passive BP) Chassis, top plate 4x 2.5" 15mm internal, 2x 2.5" 7mm SATA hot-swap, 3x 8038 fan, Acbel 800W redundant power supply Titanium, low profile rear panel, 28" slide rail, without bezel
XE1-2KT01-10	2U 8x 3.5"/2.5" SAS/SATA/NVMe hot-swap (Passive BP) chassis, top plate 4x 2.5" 15mm internal, 2x 2.5" 7mm SATA hot-swap, 3x 8038 fans, Acbel 800W redundant power supply Titanium, low profile rear panel, 28" slide rail, without bezel