





Front View

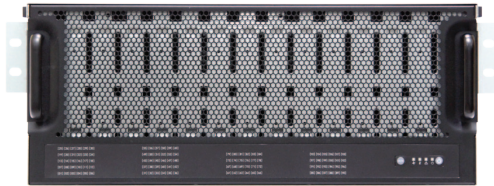

Features

- Intelligent Enclosure Management
- Individual drive power management
- Hot swap design for easy maintenance and management
- Enclosure Cable Management Kit
- Tool-less drive trays

Rear View

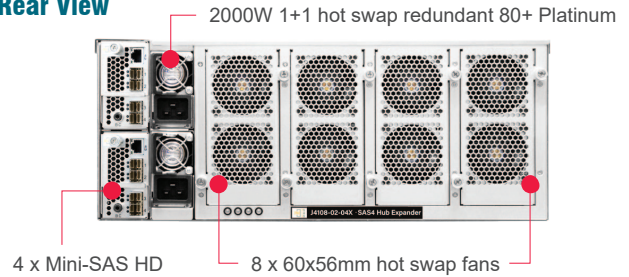

Specifications

General	Number of Expander	Single/Dual
	Expander Chip	Hub: SAS4x48 Edge: SAS35x40 & SAS35x36/SAS4x40 & SAS4x32
	Host/Expansion Interface	4 x Mini-SAS HD (SFF-8674) per expander module (backward compatible with SFF-8644 SAS12G)
Drives Supported	Drive Interface	• 24Gb & 12Gb SAS if using dual expanders • 24Gb & 12Gb SAS + 6Gb SAS/SATA if using single expander
	Form Factor	3.5"
Administration / Management	Admin/Firmware Upgrade	• In-band • IEM port
	LED Indicators, Audible Alarm	Yes
Hot swap and Redundancy	Drive Bays	108
	Cooling	• 8 x 60x56mm hot swap fans • 1 x 40x56mm fan per expander module
	Power Supply	• 2000W 1+1 hot swap redundant 80+ Platinum (with C20 power plug) • 2000W 1+1 hot swap redundant 80+ Titanium (with C14 power plug)
	Power Entry	Dual AC Inlet
	Expander Modules	Dual SAS topology (Optional)

Electrical and Environmental	AC Input	Platinum: • 200-240V~, 50/60Hz, 15A Titanium: • 100-127V~, 50/60Hz, 12A (except China) • 200-240V~, 50/60Hz, 10A
	Operating Environment	• Temperature : 0°C to 35°C • Relative humidity : 20% to 80%
	Non-operating Environment	• Temperature : -20°C to 60°C • Relative humidity : 10% to 90%
Physical Specification	Dimensions (W x D x H)	mm : 434 x 1050 x 176 434 x 1273 x 176 (with CMA) inches : 17 x 41 x 7 17 x 50 x 7 (with CMA)
	Gross Weight (w/ PSU, Rail and Pallet; w/o Disks)	kgs : 66.97 lbs : 147.6
	Packaging Dimensions (W x D x H)	mm : 640 x 1380 x 526 inches : 25.2 x 54.3 x 20.7
	Mounting	Standard : 41" slide rail Option : Cable Management Kit

Ordering Information

SKU Number	Description
XJ1-41082-01	4U 108x 3.5" HS bays, HS JBOD w/ single SAS 12G edge/24G hub expander controller, single BMC, tool-less HDD tray, 2000W 1+1 HS redundant 80+ Platinum (C20 inlet), tool-less rail kit
XJ1-41082-02	4U 108x 3.5" HS bays, HS JBOD w/ dual SAS 12G edge/24G hub expander controller, dual BMC, tool-less HDD tray, 2000W 1+1 HS redundant 80+ Platinum (C20 inlet), tool-less rail kit
XJ1-41082-03	4U 108x 3.5" HS bays, HS JBOD w/ single SAS 12G edge/24G hub expander controller, single BMC, tool-less HDD tray, 2000W 1+1 HS redundant 80+ Titanium (C14 inlet), tool-less rail kit
XJ1-41082-04	4U 108x 3.5" HS bays, HS JBOD w/ dual SAS 12G edge/24G hub expander controller, dual BMC, tool-less HDD tray, 2000W 1+1 HS redundant 80+ Titanium (C14 inlet), tool-less rail kit
XJ1-41082-05	4U 108x 3.5" HS bays, HS JBOD w/ single SAS 24G edge/hub expander controller, single BMC, tool-less HDD tray, 2000W 1+1 HS redundant 80+ Platinum (C20 inlet), tool-less rail kit
XJ1-41082-06	4U 108x 3.5" HS bays, HS JBOD w/ dual SAS 24G edge/hub expander controller, dual BMC, tool-less HDD tray, 2000W 1+1 HS redundant 80+ Platinum (C20 inlet), tool-less rail kit
XJ1-41082-07	4U 108x 3.5" HS bays, HS JBOD w/ single SAS 24G edge/hub expander controller, single BMC, tool-less HDD tray, 2000W 1+1 HS redundant 80+ Titanium (C14 inlet), tool-less rail kit
XJ1-41082-08	4U 108x 3.5" HS bays, HS JBOD w/ dual SAS 24G edge/hub expander controller, dual BMC, tool-less HDD tray, 2000W 1+1 HS redundant 80+ Titanium (C14 inlet), tool-less rail kit